

Mixer/Amps with Sources

ACR-60M/120M Mixer Amp with CD, MP3 and Receiver

The ACR-60M and ACR-120M are monaural mixer/receivers with 60W and 120W RMS output power, respectively. They offer a single CD player, a digital AM/FM tuner, three balanced mic inputs, and one auxiliary input. Other features included are voice-activated priority and four-tone pre-announcement chime. Loudspeaker outputs are provided for 4Ω loads or two zones of 70V or 100V high impedance loads.

Features



- Output Power of 120W(ACR-120M)
- 4Ω or 25/70V Outputs
- Four Mixable Inputs: Three Balanced Mics, One Aux
- Digital AM/FM Tuner with 30-Station Preset Memory
- Voice-Activated Priority Muting on Mic 1
- Manual Four-Tone Pre-Page Chime
- Two-Zone Speaker Selector Buttons
- Bass and Treble Tone Controls
- Single-CD Player with 24-Track Memory
- Pre-Amp Out (Post-Tone Controls) for External Signal Processing
- Power Amp Input (Normalized) for Patch of External Signals
- Rack Mount Kit included (3RU)



25V

Specifications

Model	ACR-120M
Power Output (RMS) (< 1% THD)	120W @ 4Ω or 25/70V (use 25V tap for 9484 only)
Frequency Response (+1/-3 dB): MIC 1-3	100Hz-12kHz
AUX	60Hz-15kHz
AMP IN	60Hz-18kHz
Input Sensitivity/Impedance: MIC 1-3	1mV/600Ω
AUX	350mV/10kΩ
AMP IN	1V/10kΩ
Signal to Noise Ratio: MIC 1-3	>60dB
AUX	>75dB
Tone Control: Bass (100Hz)	±12dB
Treble (10kHz)	±12dB
Tuner: Tuning Range	FM:87.5-108MHz, AM:522-1620kHz
Usable Sensitivity	FM:2μV, AM:12μV
CD Frequency Response (+1/-3dB)	20Hz-20kHz
Power Source	120VAC/60Hz
Weight	14.5kg/32lbs.
Dimensions	420(W) x 132(H) x 320(D) mm 16.5(W) x 5.2(H) x 12.6(D) inches

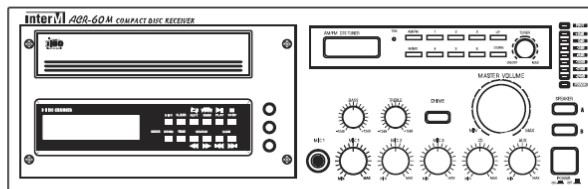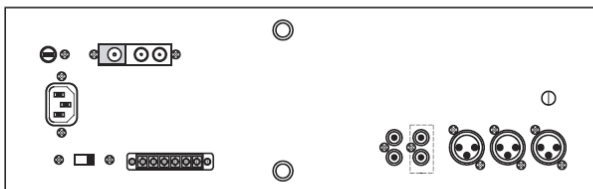

866-636-5795

interM

www.inter-m.net

ORDER FROM: Lubell Labs Inc.
21 N. Stanwood Rd.
Columbus, Ohio 43209 USA
(614) 235-6740 or sales at lubell.com