
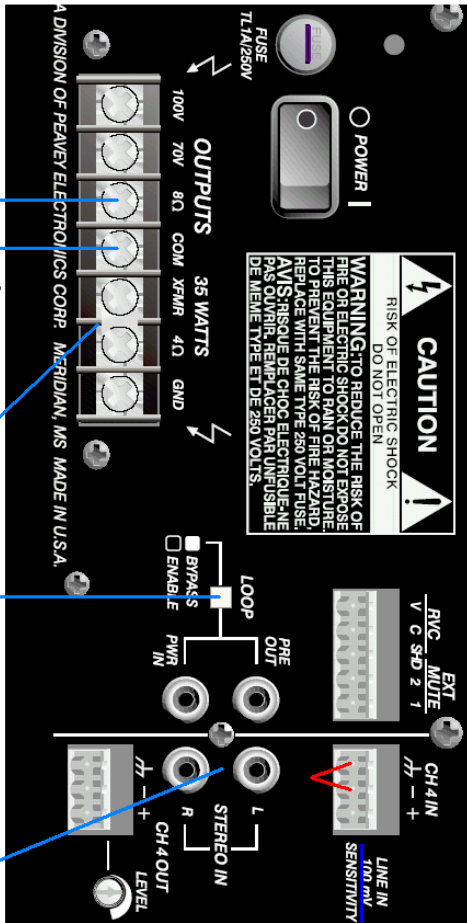


Connection of UW30 to UMA352 Amplifier

IMPORTANT CAUTION:

Connect power cord to grounded GFCI protected AC outlet only.
Install amplifier in dry air conditioned room only.

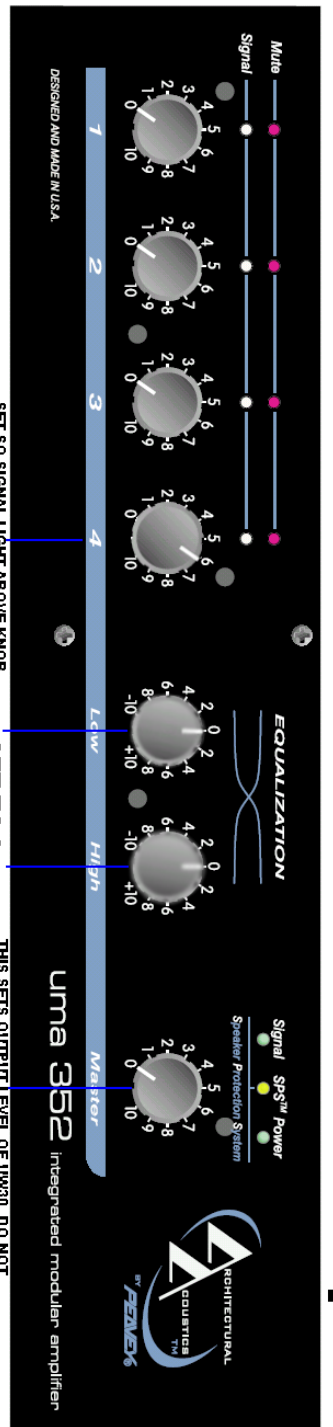

White wire from UW30 connected via 1.5A fuse & 25 ohm 25 watt resistor per UW30 data sheet.

BLACK WIRE UW30

GREEN WIRE from UW30 to approved pool ground.

Install UW30 at 4' - 6' depth in Paragon 68103 wet niche. Must be bonded and grounded per NEC 680.27. Cover niche with 68103SS SS grille.

MUST HAVE JUMPER BETWEEN "XFMR & 4 OHM" TERMINALS

SET TO "BYPASS" POSITION

1. CONNECT YOUR DAT OR CD "OUTPUT" TO EITHER OR BOTH OF THESE JACKS
2. IF YOUR DAT OR CD HAS A VOLUME CONTROL, SET IT TO "7" AND LEAVE IT.

3. SET PEAVEY CHANNEL 4 KNOB AS REQUIRED SO SIGNAL LIGHT ABOVE KNOB IS MAINLY GREEN, AND ONLY FLASHES RED DURING LOUDEST PEAK.
4. SET OVERALL SPEAKER VOLUME USING "MASTER" KNOB ON PEAVEY AMPLIFIER. DO NOT ALLOW SPS LIGHT TO FLASH OR SPEAKER WILL OVERLOAD.

INSTALL JUMPER WIRE AS MARKED FOR UNBALANCED OPERATION (DO THIS IF YOU HEAR HUM FROM UW30)

SET TO SIGNAL LIGHT ABOVE KNOB IS GREEN WITH OCCASIONAL RED FLASH

SET TO 0

THIS SETS OUTPUT LEVEL OF UW30. DO NOT ALLOW SPS LIGHT TO FLASH (OVERLOAD)