



Connection of UW30 to UMA752 Amplifier

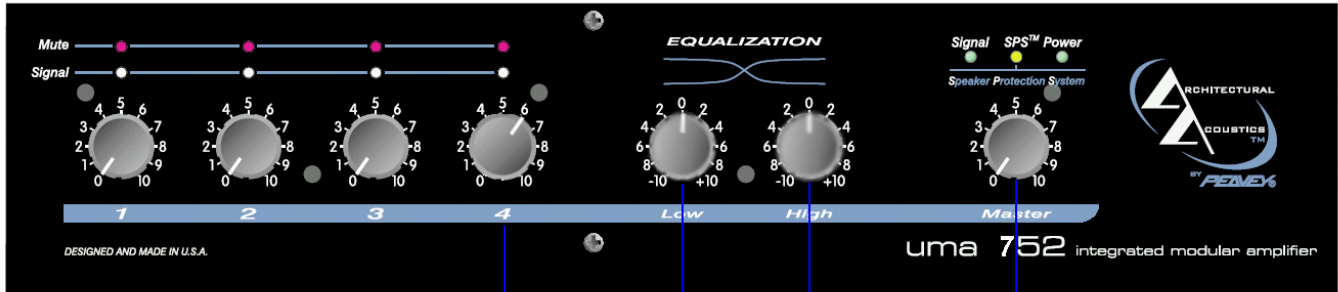

SET SO SIGNAL LIGHT ABOVE KNOB IS GREEN WITH OCCASIONAL RED PEAK
 SET TO 0
 THIS SETS OUTPUT LEVEL OF UW30. DO NOT ALLOW SPS LIGHT TO FLASH (OVERLOAD)

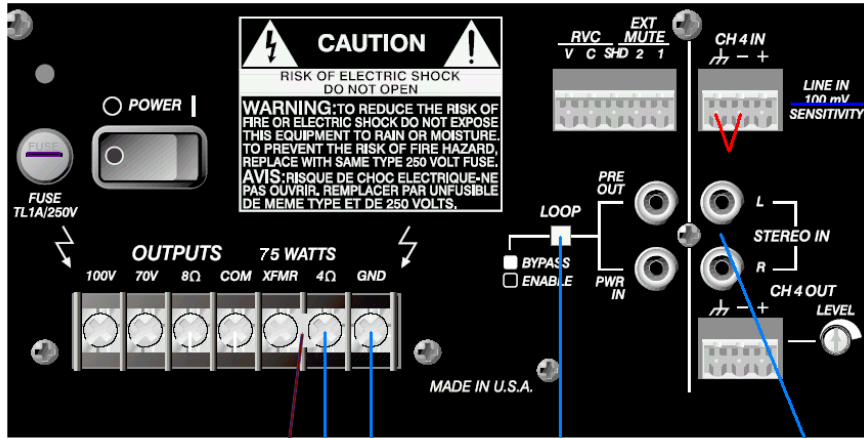

INSTALL JUMPER WIRE AS MARKED FOR UNBALANCED OPERATION (DO THIS IF YOU HEAR HUM FROM UW30)

CONNECT THIS GROUNDED POWER CORD TO GROUNDED GFCI PROTECTED OUTLET ONLY!

REMOVE JUMPER
 WHITE WIRE UW30
 BLACK WIRE UW30
 USE UW30 AT 4' DEPTH. REFER TO UW30 GUIDE FOR ANY ADDITIONAL INSTRUCTIONS. CONNECT NO MORE THAN 2 UW30'S

SET TO "BYPASS" POSITION

1. CONNECT YOUR DAT OR CD "OUTPUT" TO EITHER OR BOTH OF THESE JACKS
 2. IF YOUR DAT OR CD HAS A VOLUME CONTROL, SET IT TO "7" AND LEAVE IT.

3. SET PEAVEY CHANNEL 4 KNOB AS REQUIRED SO SIGNAL LIGHT ABOVE KNOB IS MAINLY GREEN, AND ONLY FLASHES RED DURING LOUDEST PEAK.
 4. SET OVERALL SPEAKER VOLUME USING "MASTER" KNOB ON PEAVEY AMPLIFIER. DO NOT ALLOW SPS LIGHT TO FLASH OR SPEAKER WILL OVERLOAD. USE EQUALIZER CONTROLS SPARINGLY!